
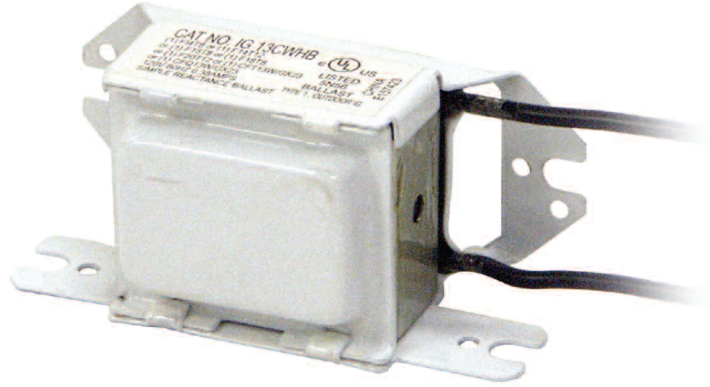


# ENCAPSULATED CORE & COIL BALLAST SINGLE LAMP

- Product Specifications listed below
- Magnetic Ballast Warranty Info in back of this section



## CASE STYLES

A	B	C	D	E	F	
2	3 5/64"	2 9/16"	1 1/4"	1 47/64"	2 47/64"	3 5/64"

Lamp Data		Part #	Circuit Electrical Data						Physical Data			Certification
Watts	Model#		Volts	Hz	Line Current (Amps)	Input (Watts)	Minimum Starting Temp	Sound Rating	Case Style	Std. Pkg	Weight	
13	CFT13W/GX23 CFQ13W/G23-2	*IG13CP	120	60	0.300	16	0°C	A	2	50	33lbs.	UL-CUL
15,17,20	IG15-20 F15T8 F15T12 F17T8 F20T12	IG15-20	120	60	0.260	15-20	0°C	A	2	50	33lbs.	UL-CUL
14,15,18,20	F14T12 F14T8 F15T8 F18T8 F20T12	IG13CWHB	120	60	0.300	15	0°C	A	2	100	30lbs.	UL-CUL
5,7,9	CFT9W/G23 CFT7W/G23 CFT5W/G23	*IG9CP	120	60	0.150	10.2	0°C	A	2	100	30lbs.	UL-CUL
13	CFT13W/GX23 CFT13W/GX23	IG13C	120	60	0.350	16.0	0°C	A	2	50	33lbs.	UR

\* Ballast Class P

NOTE: All Ballasts Type 1, Outdoor

